

SAW Filter 1575.420MHz

Model: TA0714A

Part No: MP01378

Rev. No: 1

A. MAXIMUM RATING:

1. Input Power Level: 10dBm
2. DC Voltage: 3V
3. Operating Temperature: -40°C to +85°C
4. Storage Temperature: -55°C to +95°C

B. ELECTRICAL CHARACTERISTICS:

1. Terminating source impedance: $Z_S = 50\Omega$
2. Terminating load impedance: $Z_L = 50\Omega$

Item	Unit	Min.	Typ.	Max.
Center Frequency F_c	MHz	-	1575.42	-
Max. Insertion Loss (1574.42 ~ 1576.42MHz) IL	dB	-	1.1	1.6
Amplitude ripple (1574.42 ~ 1576.42MHz)	dB	-	0.1	0.5
VSWR (1574.42 ~ 1576.42MHz)		-	1.3	1.9
Attenuation				
100 ~ 960MHz	dB	25	27.5	-
960 ~ 1460MHz	dB	25	28	-
1460 ~ 1513MHz	dB	25	28	-
1648 ~ 1710MHz	dB	15	19	-
1710 ~ 1990MHz	dB	20	24	-
1990 ~ 2300MHz	dB	25	31	-
2300 ~ 4000MHz	dB	25	30	-
4000 ~ 6000MHz	dB	20	24	-



SAW Filter 1575.420MHz

Model: TA0714A

Part No: MP01378

Rev. No: 1

E. FREQUENCY CHARACTERISTICS:

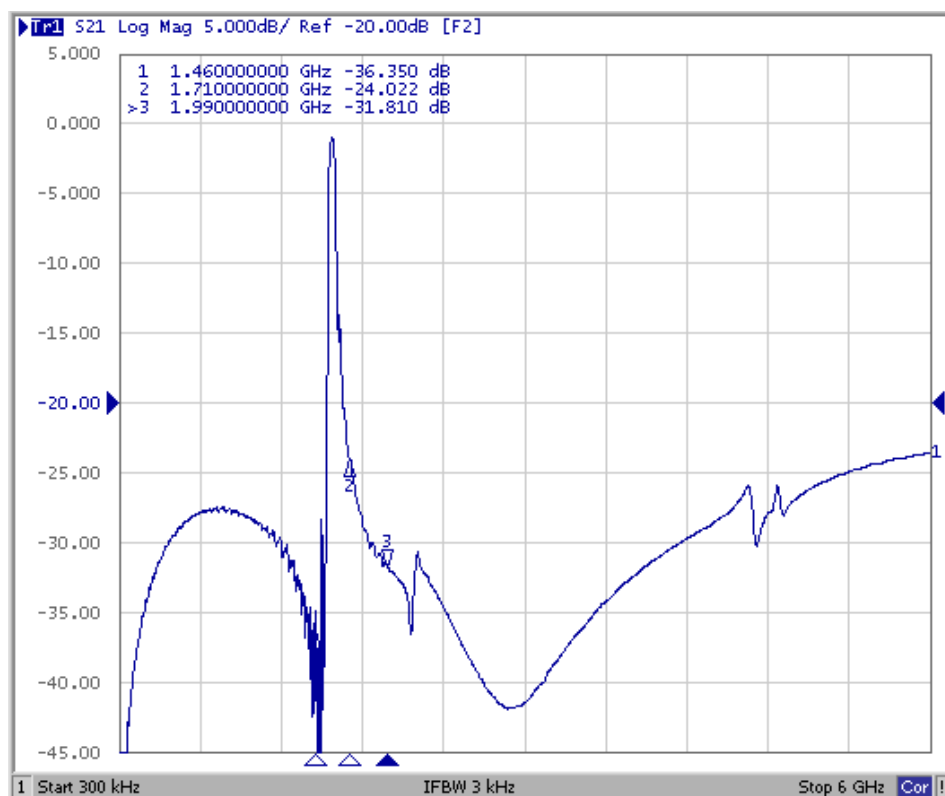
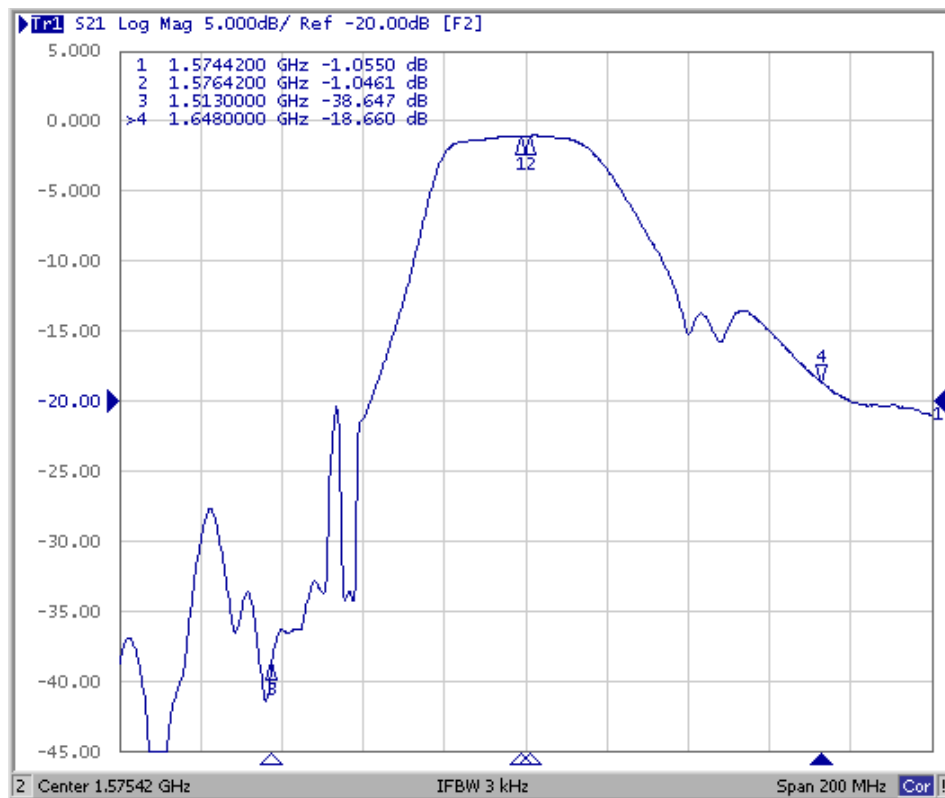


SAW Filter 1575.420MHz
Part No: MP01378



Model: TA0714A
Rev. No: 1

Reflection Functions

S11

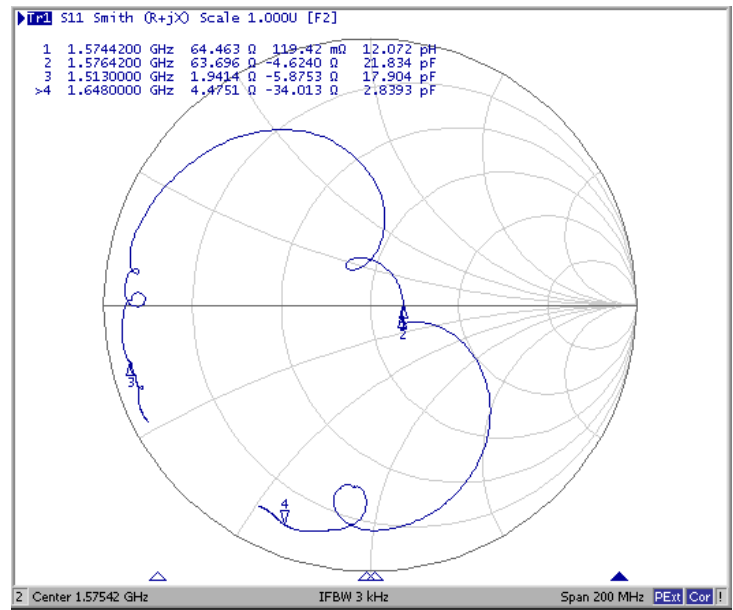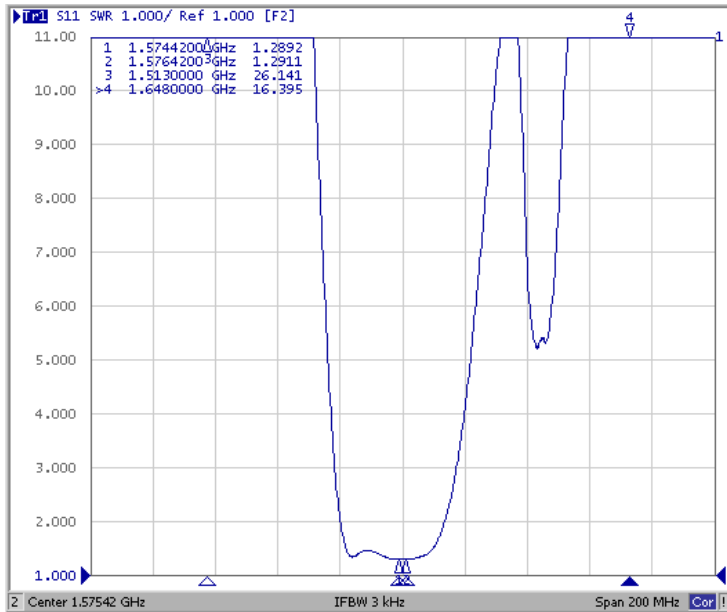

S22

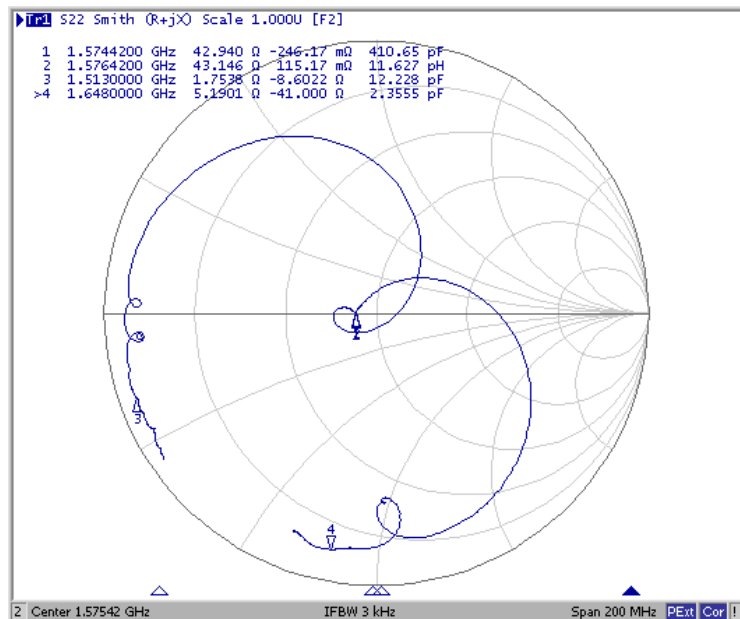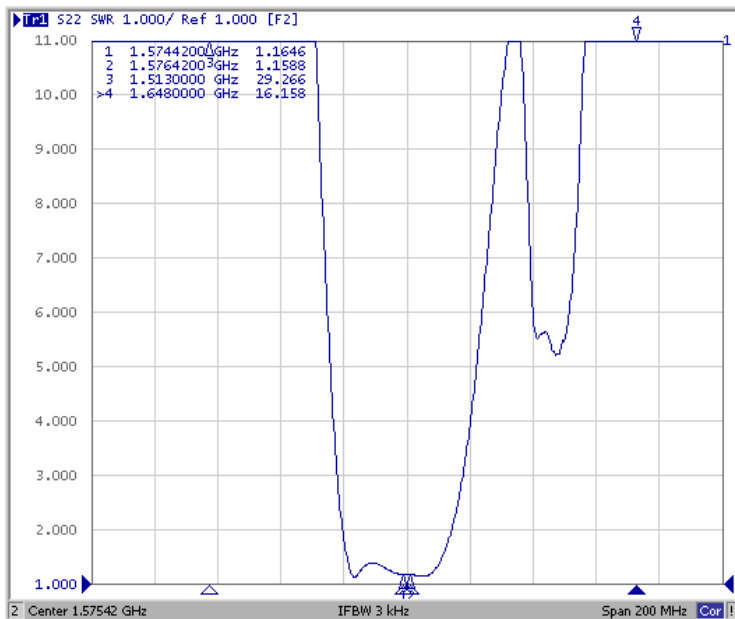


SAW Filter 1575.420MHz
Part No: MP01378


Model: TA0714A
Rev. No: 1

F. PACKING:

1. Reel Dimension

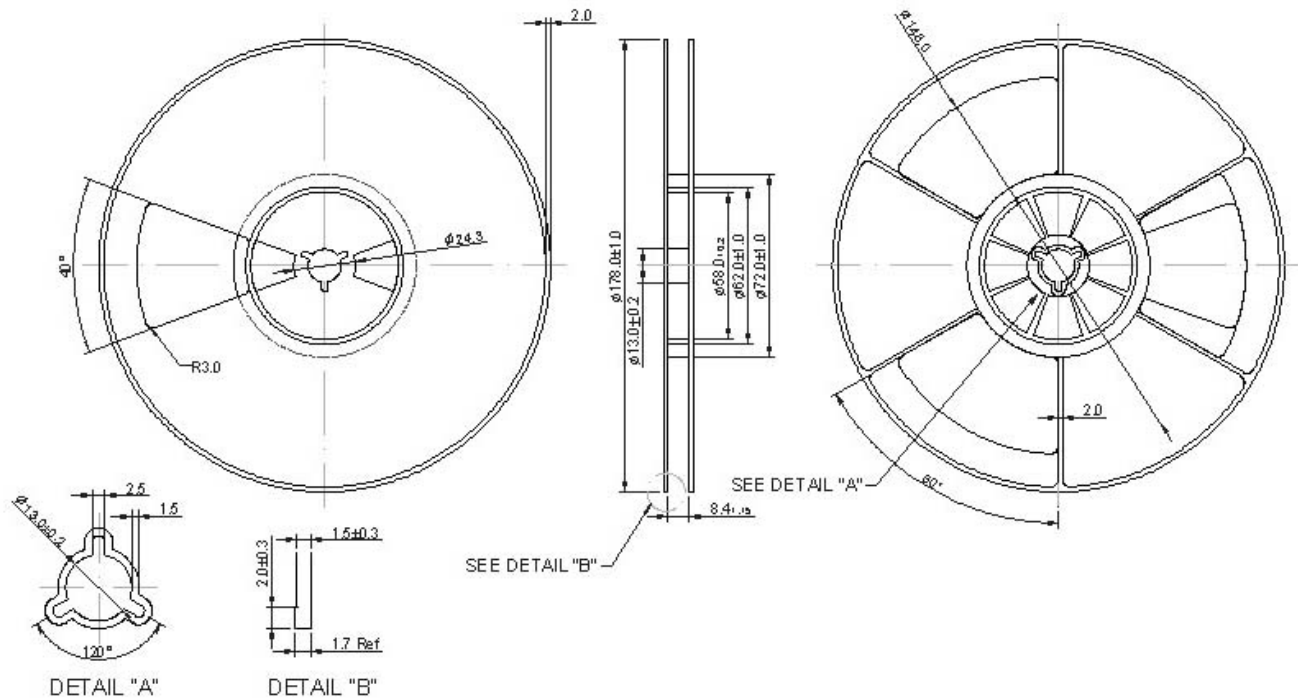

2. Tape Dimension

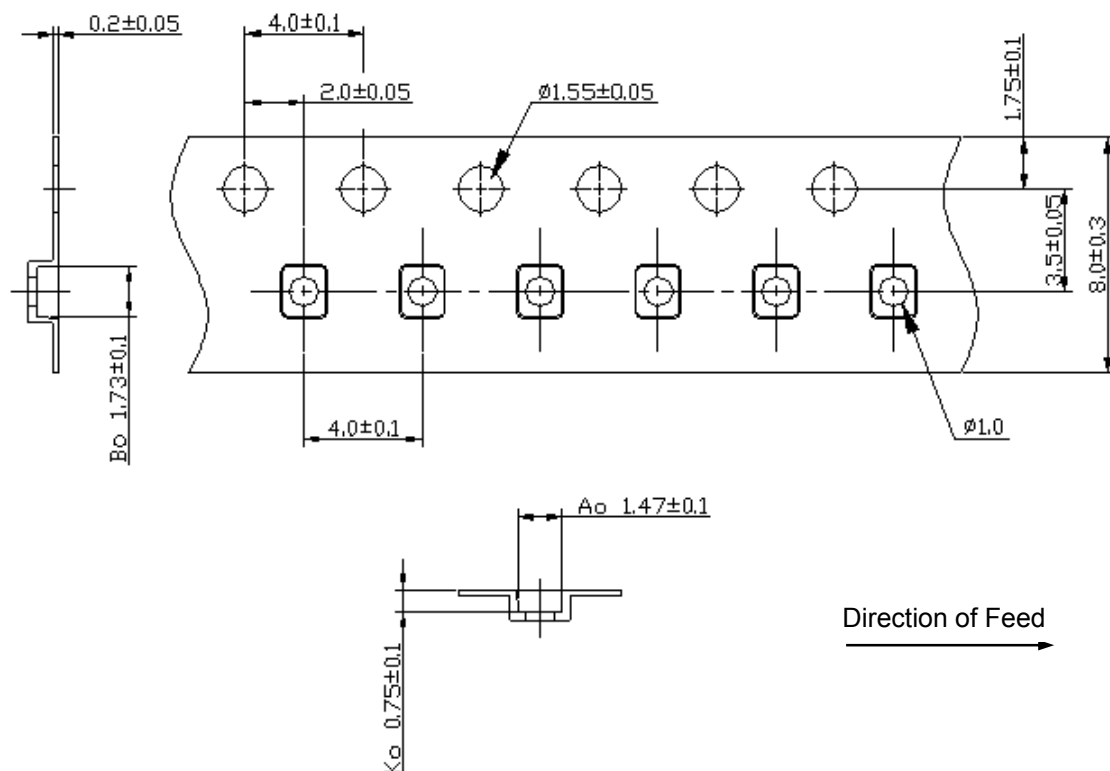

SAW Filter 1575.420MHz

Model: TA0714A

Part No: MP01378

Rev. No: 1

G. RECOMMENDED REFLOW PROFILE:

