


GMCF-45

45G30A1

**45MHz 2 pole crystal filter with
30.0kHz 3dB bandwidth**

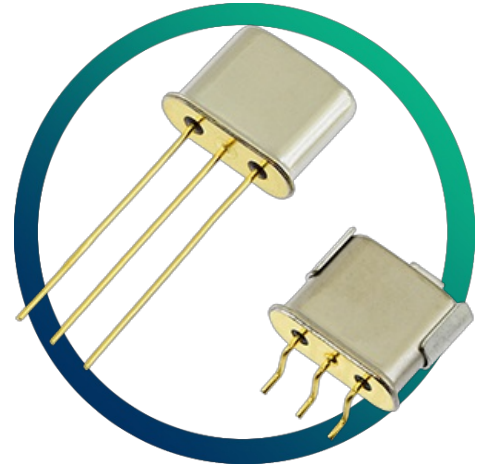

- Custom specifications available
- Fundamental or 3rd overtone modes
- Comprehensive stocks

CONFIGURABLE OPTIONS


Parameter	Option Code
Package	
Any	
UM-1/3L (leaded)	
UM-5/3L (leaded)	
UM-1JN/3L (SMT)	
UM-5JN/3L (SMT)	

SPECIFICATIONS


Centre frequency	45.0MHz
Dimensions	Package options available - see Package Drawing
Operating temperature range	-20 to +70°C
Number of poles	2
Pass band	-3dB @ ±15.0kHz min
Attenuation band	-15dB @ ±50.0kHz max
In-band ripple	1.0dB max
Insertion loss	2.0dB max
Guaranteed attenuation	-35dB max +600 ~ +1000kHz -35dB max -500 ~ -1000kHz
Termination	800Ω // 1.5pF
Package style	UM-1/3L, UM-5/3L (through-hole) UM-1JN/3L, UM-5JN/3L (SMT)

PACKAGE DRAWING

Package Options

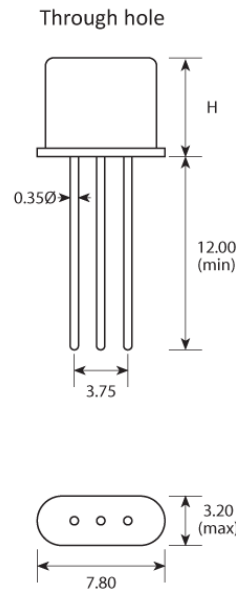

Package	Height H
UM-1/3L	8.00 max
UM-5/3L	6.00 max

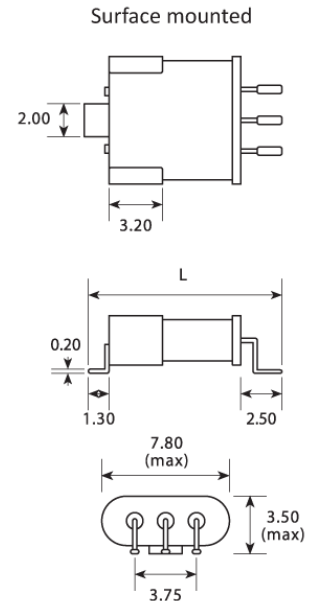

Package	Length L
UM-1JN/3L	12.50 max
UM-5JN/3L	10.50 max

Dimensions in mm

ORDERING INFORMATION

To request a quotation for the GMCF-45 45G30A1 please use the configurable options form to choose the options you require and then submit your configured product to our team. Our expert advisers are always happy to help with your requirements and can be contacted on +44 1460 256 100 or at sales@golledge.com.

Following product selection you will be issued with a seven character Golledge part number. Your Golledge part number is the internationally accepted Golledge manufacturing part number (MPN) that should be used for all project documentation, including bills of materials (BoMs) and purchase orders.

If you have any queries regarding any of our documentation our dedicated sales team will be happy to help.

HANDLING & STORAGE



Human Body Model (HBM) 1A (250V to <500V)



Moisture Sensitivity Level (MSL): 1 (or not applicable)

CONSTRUCTION

Resistance weld

COMPLIANCE

Lead-free (< 0.1% by weight)

RoHS compliant with no exemptions. [See our declaration](#)REACH compliant. [See our statement](#)Free of conflict minerals. [See our declaration](#)Free of Halogens. [See our declaration](#)Free of Ozone-depleting substances. [See our declaration](#)